

BRAND NEW & VERIFIED



VERIFIED PRODUCT DATASHEET

DS-C9148T-48PETK9

Cisco Network Hardware Specification, Availability and Quote Reference

Product Model	DS-C9148T-48PETK9
Document Type	Product Datasheet
Condition	Brand New, Original and Verified
Supplier	Layer23-Switch.com

200+ Countries Sold	18,000+ Customers Trusted	\$20M Inventory Available	1-Year Warranty Support
-------------------------------	-------------------------------------	-------------------------------------	-----------------------------------

Need Price or Availability?

View product details, check stock, or request a fast quotation from Layer23-Switch.

[View Product Page & Request a Quote](#)



DS-C9148T-48PETK9 Datasheet



The Cisco DS-C9148T-48PETK9 datasheet provides verified specifications, key features, and application scenarios. This document helps engineers and IT buyers quickly evaluate the DS-C9148T-48PETK9 and integrate it into enterprise or service provider networks with confidence.

[Read More](#) | [Quote](#)

Key Features

Scalable 32G Fibre Channel edge for high-IOPS workloads

48 active ports at line-rate and low latency serve all-flash arrays, OLTP databases, and backup windows that must finish on time.

Future-ready NVMe/FC migration

Run SCSI/FCP today and transition to NVMe/FC on the same fabric, keeping policies, zoning, and workflows consistent.

Built-in visibility and observability

Hardware-assisted SAN Analytics, slow-drain detection, ISL/HBA diagnostics, and streaming telemetry speed root-cause analysis and capacity planning.

Enterprise-class resiliency

Hot-swappable dual PSUs and fans, plus ISL port-channels and consistent forwarding, support 24x7 operations and change windows.


Segmentation and multi-tenancy

VSANs, Smart/Auto Zoning, and IVR (license) enable secure tenant/application isolation with granular QoS and simplified change control.

Data-center friendly airflow and footprint


Port-side exhaust airflow aligns with hot/cold-aisle designs; compact 1RU chassis fits standard 19-inch racks with room for cable management.

Front View

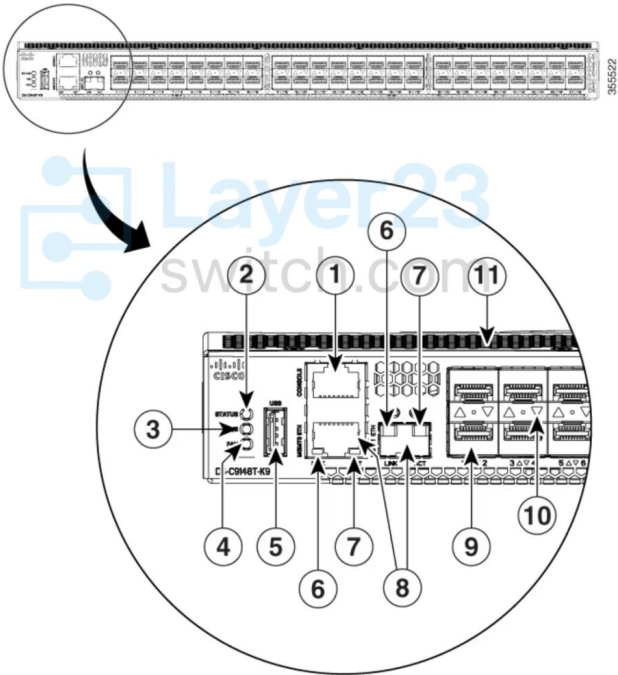


1	Serial console port	7	Activity status LED
2	System status LED	8	Ethernet management ports (2)
3	Power status LED	9	Fixed FC ports
4	Fan status LED	10	FC port status LEDs (48)
5	USB port	11	Airflow grill
6	Link status LED		

Rear View

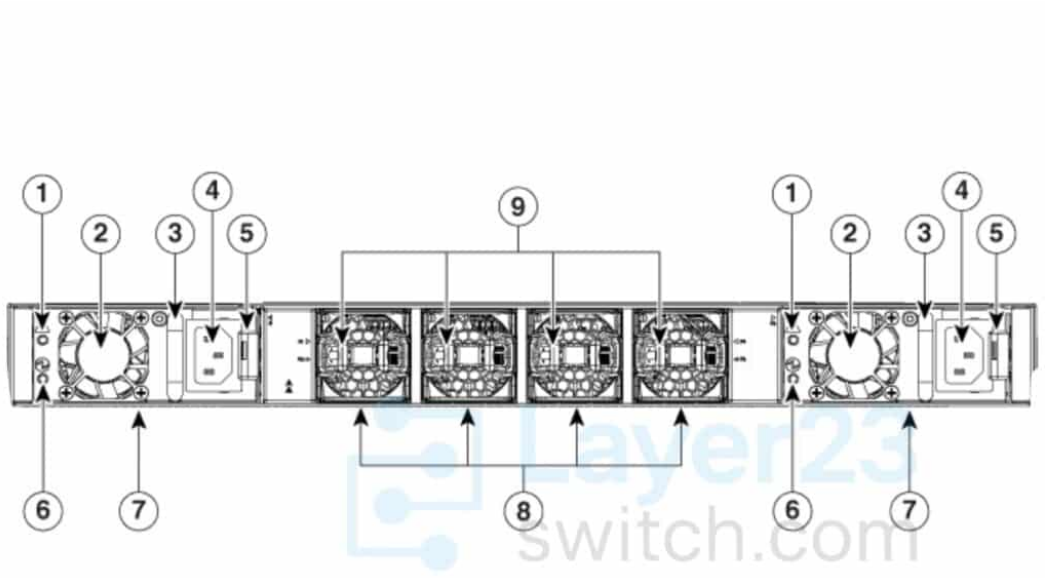

1	Power supply failure status LED	6	Power supply status LED
2	Power supply unit fan	7	Power supply units (2 units)
3	Power supply unit handle	8	Chassis fan modules (4 units)
4	Unswitched power receptacle	9	Chassis fan module release latches (8)
5	Power supply unit latch release		

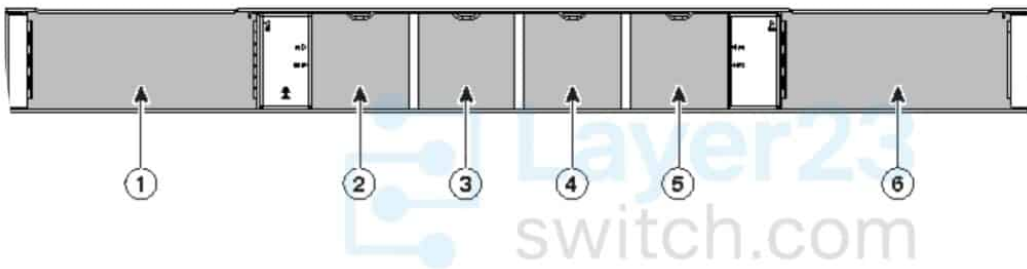

1	Power supply unit slot 1	4	Chassis fan module slot 3
2	Chassis fan module slot 1	5	Chassis fan module slot 4
3	Chassis fan module slot 2	6	Power supply unit slot 2

Specification

Parameter	Specification	Parameter	Specification
Product model	DS-C9148T-48PETK9 (MDS 9148T series)	Form factor	1RU fixed FC switch
Physical FC ports	48 x SFP+/SFP28 Fibre Channel	Licensed ports	48 active (max)
Port speeds	Auto-sensing 4/8/16/32Gbps	Performance	Non-blocking, line-rate on all ports
Aggregate bandwidth	Up to 1.536Tbps	Latency	Low, cut-through switching
Expansion model	N/A (already max licensed)	Port-channel	ISL PortChannels for resiliency
Protocols	FCP, NVMe/FC	Fabric services	VSANs, IVR (license), Smart/Auto Zoning, QoS

Parameter	Specification	Parameter	Specification
Analytics/telemetry	Hardware-based SAN Analytics; model-driven telemetry	Diagnostics	ISL/HBA diagnostics, slow-drain detection, SPAN/RSPAN
Management	NX-OS CLI/SSH, SNMP, REST/NX-API	Controller	Cisco NDFC/DCNM
High availability	Hot-swappable dual PSUs and fans	Airflow	Port-side exhaust (blue) variant
Power	AC PSU options; 1 required, 2 for redundancy	Cooling	Redundant hot-swappable fan modules
Security	RBAC, TACACS+/RADIUS/LDAP/AD, Secure boot	FC-SP	DH-CHAP; optional link encryption
Automation	REST/NX-API, Python/Ansible; POAP	Call Home	Integrated
Front I/O	48 x FC ports; USB; serial console	Management ports	Ethernet management for OOB
LEDs	System, fan, PSU, link/activity	Interoperability	MDS 9000 family per compatibility matrix
Dimensions/weight	1RU; per datasheet	Environmental	Per datasheet (operating temp/humidity)
Power/thermal	Per PSU/datasheet	Certifications	Safety/EMC/RoHS per Cisco
Transceivers	Cisco 32G/16G/8G FC optics supported	Accessories	Rail kit, regional power cords (optics ordered separately)

Want to Buy

[Order Now](#) [Get a Quote](#)

Why Layer23-Switch.com

As a leading network hardware supplier, Layer23-Switch.com focuses on original new ICT equipment of Cisco, H3C, Juniper, etc.

200+ Countries we Sold
18,000+ Customers Trusted
\$20,000,000 Inventory Available
50%-98% Off Global List Price
100% Safe Online Shopping

Contact Us

- WhatsApp: [+8617181189993](https://wa.me/+8617181189993)
- Wechat: [layer23-switch](#)
- Telegram: [layer23_switch](#)
- Email: sales@layer23-switch.com

Need Price and Availability for DS-C9148T-48PETK9?

View product details, request a quote, or check current stock from Layer23-Switch.

[View Product Details & Request a Quote](#)