

BRAND NEW & VERIFIED



VERIFIED PRODUCT DATASHEET

IE-3300-8T2S-A

Cisco Network Hardware Specification, Availability and Quote Reference

Product Model	IE-3300-8T2S-A
Document Type	Product Datasheet
Condition	Brand New, Original and Verified
Supplier	Layer23-Switch.com

200+ Countries Sold	18,000+ Customers Trusted	\$20M Inventory Available	1-Year Warranty Support
-------------------------------	-------------------------------------	-------------------------------------	-----------------------------------

Need Price or Availability?

View product details, check stock, or request a fast quotation from Layer23-Switch.

[**View Product Page & Request a Quote**](#)

IE-3300-8T2S-A Datasheet

The Cisco IE-3300-8T2S-A datasheet provides verified specifications, key features, and application scenarios. This document helps engineers and IT buyers quickly evaluate the IE-3300-8T2S-A and integrate it into enterprise or service provider networks with confidence.

[Read More](#) | [Quote](#)




Key Features

IE-3300-8T2S-A Front Panel Overview

The illustrations in this section provide an overview of the variety of components available on the various switch models in this product family. Not all models are illustrated.

1	10/100/1000 Copper Ethernet ports (downlink ports)	7	Flash memory card slot
2	Power connector DC-B	8	SFP module slots (uplink ports)
3	Power connector DC-A	9	USB mini-Type B (console) port
4	Protective ground connection	10	RJ-45 console port
5	Alarm connector	11	USB mini-Type A port
6	10/100/1000 Copper Ethernet ports (downlink ports)		

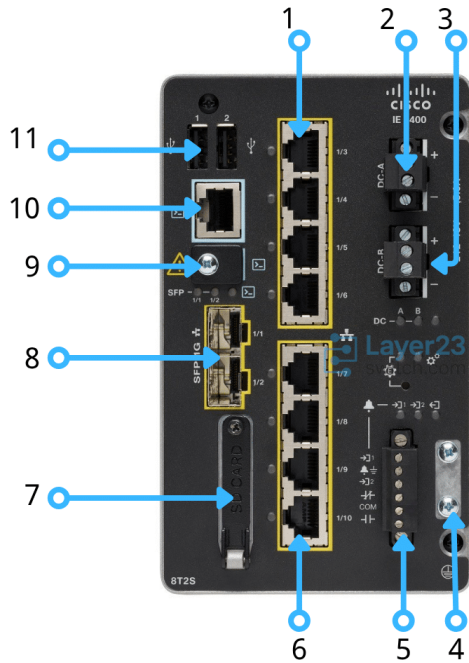

Specification

IE-3300-8T2S-A Detailed Specifications	
Total Ports	10 (8×GE copper, 2×1 Gb SFP)
CPU / OS	4-core ARM running Cisco IOS XE
DRAM	4 GB
Flash (user)	1.5 GB
Forwarding Rate	Line-rate all packet sizes
Egress Queues/Port	8
MAC Address Table	16 K entries
VLANs	256 IEEE 802.1Q
IPv4 Routes	3 000 indirect
PTP Profiles	IEEE 1588v2 Boundary Clock
Ring Resiliency	REP, Fast REP, MRP (< 50 ms)
Security	MACsec-256, TrustSec SGT/SGACL, 802.1X

IE-3300-8T2S-A Detailed Specifications	
Management	CLI, WebUI, NETCONF/RESTCONF, gRPC
Telemetry	Full Flexible NetFlow + gRPC
Input Voltage	9.6-60 V DC (dual redundant)
Power Consumption	23 W (typical, no PoE)
Operating Temp	-40 °C to +75 °C
Dimensions	15.2 × 9.7 × 13.5 cm
Weight	1.6 kg
Compliance	IEC 61850-3, EN 50121-4
MTBF	≈ 463 629 h (Telcordia)*

Want to Buy

[Order Now](#) [Get a Quote](#)

Why Layer23-Switch.com

As a leading network hardware supplier, Layer23-Switch.com focuses on original new ICT equipment of Cisco, H3C, Juniper, etc.

200+ Countries we Sold **18,000+** Customers Trusted **\$20,000,000** Inventory Available **50%-98%** Off Global List Price **100%** Safe Online Shopping

Contact Us

- WhatsApp: [+8617181189993](tel:+8617181189993)
- Wechat: [layer23-switch](https://www.layer23-switch.com)
- Telegram: [layer23_switch](https://www.layer23-switch.com)
- Email: sales@layer23-switch.com

Need Price and Availability for IE-3300-8T2S-A?

View product details, request a quote, or check current stock from Layer23-Switch.

[View Product Details & Request a Quote](#)