


CISCO · CATALYST 1300 SWITCHES

C1300-48FP-4G

48x1G PoE+ Ports · 4x1G SFP Uplinks · 740W PoE Budget

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

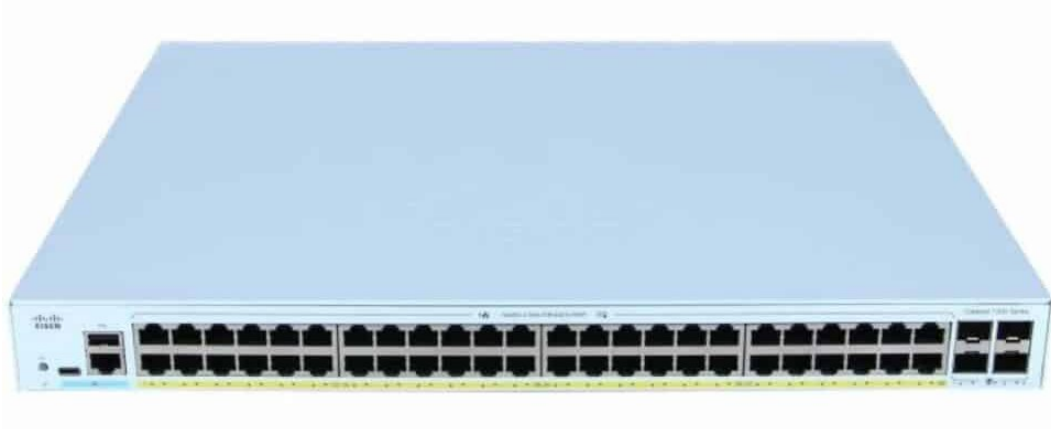

Product Model	C1300-48FP-4G
Category	Catalyst 1300 Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+

Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty



CISCO · CATALYST 1300 SWITCHES

C1300-48FP-4G

48x1G PoE+ Ports · 4x1G SFP Uplinks · 740W PoE Budget

C1300-48FP-4G is a Cisco Catalyst 1300 managed Gigabit Ethernet PoE+ switch for campus access networks that need a high-port-count Gigabit edge switch with fiber uplinks.

New, factory-sealed · 3-year LSCare warranty · 14-day returns ·
Cisco SN check before shipment

Specifications

Product ID	C1300-48FP-4G	Product type	Managed Gigabit Ethernet PoE+ switch with Layer 3 static routing features
Downlink ports	48 x 10/100/1000 RJ45 PoE+ ports	Uplink interfaces	4 x Gigabit SFP
Total system ports	52 x Gigabit Ethernet	Default PoE budget	740W power budget
PoE-capable ports	48	PoE standards	802.3at PoE+, 802.3af, Cisco pre-standard PoE
Switching capacity	104.0 Gbps	Forwarding rate	77.38 Mpps
Packet buffer	1.5 MB	Management	Cisco Business Dashboard, Cisco Business mobile app, web UI, CLI, SNMP
Operating software	Linux-based software	Layer 3 feature	Layer 3 static routing features
Console ports	Cisco standard RJ-45 console port and USB Type C port	Rack mounting	Rack-mountable
Power supply	Internal universal AC	AC input	100 to 240V, 50 to 60 Hz
System power consumption	110V=45.66W; 220V=45.14W	Power consumption with PoE	110V=854.45W; 220V=819.41W
Idle power	110V=21.27W; 220V=21.03W	Heat dissipation	2915.50 BTU/hr
Fan count	1	Acoustic noise	48.7 dBA at 25 C
MTBF	1,469,406 hours at 25 C	Chassis size	17.49 x 13.78 x 1.73 in
Unit weight	6.48 kg (14.28 lb)	Operating temperature	23 to 122 F (-5 to 50 C)
Storage temperature	-13 to 158 F (-25 to 70 C)	Package contents	Switch, power cord, mounting kit, pointer card
Rack kit scope	19-in mounting brackets included for 24/48-port models		

Optional Add-ons

Add-on	Cisco PID	Purpose
Optics	GLC-SX-MMD	1000BASE-SX SFP - MMF 850nm - DOM
Optics	GLC-LH-SMD	1000BASE-LX/LH SFP - 10km SMF / 550m MMF - DOM

Get Price and Availability for C1300-48FP-4G

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](#) Telegram [@layer23_switch](#)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.

LAYER23-SWITCH