


CISCO CATALYST 9000 SWITCH MODULES

C9400-LC-48T

48x1G RJ-45 · Data Only · Catalyst 9400 Line Card

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

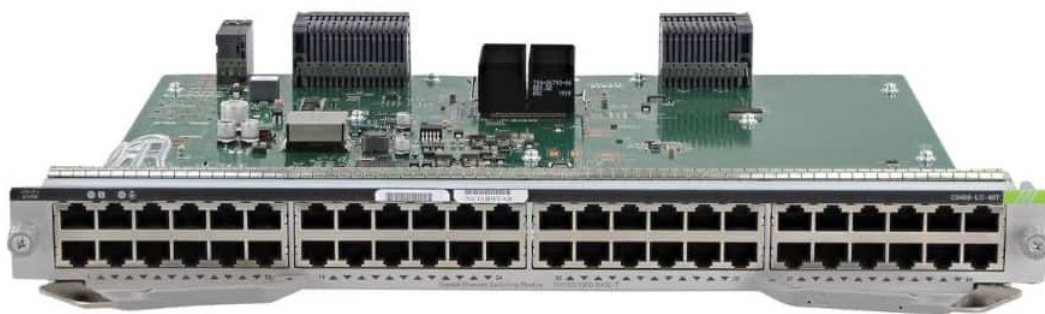

Product Model	C9400-LC-48T
Category	Cisco Catalyst 9000 Switch Modules
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+

Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty



CISCO CATALYST 9000 SWITCH MODULES

C9400-LC-48T

48x1G RJ-45 · Data Only · Catalyst 9400 Line Card

C9400-LC-48T is a Cisco Catalyst 9400 Series 48-port RJ-45 data line card for adding nonblocking 10/100/1000 copper access ports to modular Catalyst 9400 campus switching deployments.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	C9400-LC-48T	Spare PID	C9400-LC-48T=
Product type	Line card	Cisco ordering description	Cisco Catalyst 9400 Series 48-Port 10/100/1000 RJ-45 line card
Supported chassis	Catalyst 9404R, 9407R, and 9410R	Supervisor compatibility	C9400-SUP-1, C9400-SUP-1XL, C9400-SUP-1XL-Y, C9400X-SUP-2, and C9400X-SUP-2XL
Port count	48	Port speed	10/100/1000M
Port type	RJ-45 data ports	Maximum bandwidth	48 Gbps full duplex non-blocking traffic
Minimum software release	Cisco IOS XE 16.6.1 or later	Installation slot rule	Any non-supervisor module slot
Support restriction	No other restrictions listed in the line card installation note	Catalyst 9404R port density	48 / 96
Catalyst 9407R port density	48 / 240	Catalyst 9410R port density	48 / 384
Bandwidth with C9400-SUP-1	80 Gbps per slot with 1:1 oversubscription	Bandwidth with C9400-SUP-1XL or C9400-SUP-1XL-Y	240 Gbps on C9404R, 120 Gbps on C9407R, and 80 Gbps on C9410R with 1:1 oversubscription
Bandwidth with C9400X-SUP-2	240 Gbps per slot with 1:1 oversubscription	Bandwidth with C9400X-SUP-2XL	480 Gbps per slot with 1:1 oversubscription
Energy Efficient Ethernet	IEEE 802.3az support	MACsec capability	IEEE 802.1AE MACsec-256 capability in hardware
Jumbo frame support	Layer 2 to Layer 4 jumbo frame support up to 9216 bytes	PTP readiness	Hardware ready for IEEE 1588 and 802.1as
AC-input power allocated	72 W	Max rated power	65 W
Current at 120V	0.60 A	Heat dissipation	246 BTU/hr
Weight	6.2 lb (2.82 kg)	Rated MTBF	1,214,080 hours
RFID tag	Built-in front-facing passive UHF RFID tag	Physical slot usage	Occupies one slot in Cisco Catalyst 9400 Series switches

[Request a Quote](#)[View Product Page](#)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.