


CISCO · CATALYST 9500 SWITCHES

C9500-48Y4C-A-BUN

2x48x25G SFP28 Switches · 8x100G SR-BiDi Optics

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

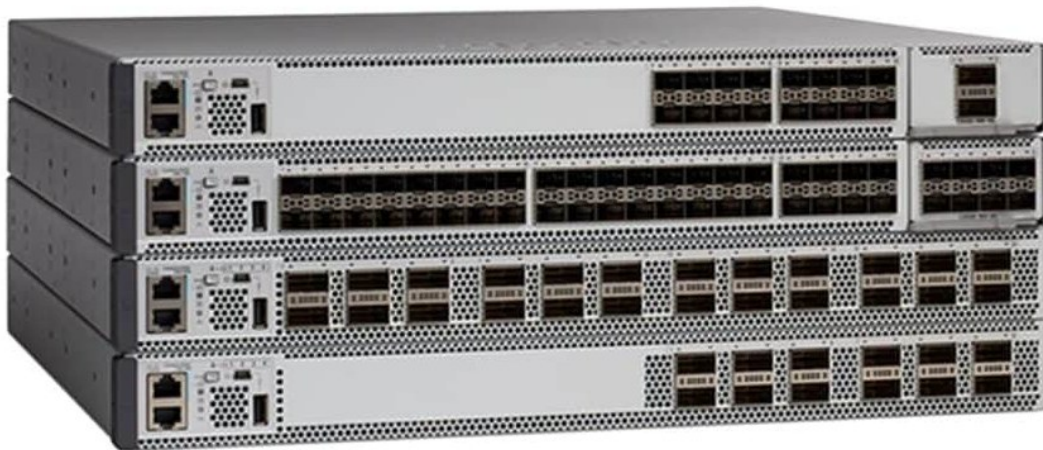

Product Model	C9500-48Y4C-A-BUN
Category	Catalyst 9500 Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+

Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty



CISCO · CATALYST 9500 SWITCHES

C9500-48Y4C-A-BUN

2x48x25G SFP28 Switches · 8x100G SR-BiDi Optics

The C9500-48Y4C-A-BUN is a Cisco Catalyst 9500 Series High Performance switch bundle for campus aggregation pairs that run 25G fiber downlinks. The bundle has two switches with 48 1G/10G/25G SFP28 ports and four 40G/100G QSFP28 uplinks each, plus eight QSFP-40/100-SRBD optics, and every switch offers 3.2 Tbps of switching capacity.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Specification	C9500-48Y4C-A-BUN	Series	Cisco Catalyst 9500 Series
Product type	High-performance switch and optics bundle	Switch quantity	2 x Cisco Catalyst 9500 High Performance 48-port 25G switches
Base PID	C9500-48Y4C-A-BUN	Included optics	8 x QSFP-40/100-SRBD
Network license	Network Advantage	Per-switch downlink ports	48 x 1G/10G/25G SFP28
Per-switch fixed uplink ports	4 x 40G/100G QSFP28	Bundle downlink ports	96 x 1G/10G/25G SFP28
Bundle fixed uplink ports	8 x 40G/100G QSFP28	ASIC	Cisco UADP 3.0
Switching capacity	Up to 3.2 Tbps per switch	Forwarding rate	Up to 1 Bpps per switch
DRAM	16 GB	Flash	16 GB
Power supply slots	2 per switch	Default power supply	C9K-PWR-650WAC-R 650W AC per switch
Power supply options	C9K-PWR-650WAC-R, C9K-PWR-650WACL-R, and C9K-PWR-930WDC-R	Fan modules	C9K-T1-FANTRAY high-performance fan tray
Rack units	1 RU per switch	Dimensions	1.73 x 17.5 x 18.0 in. (4.4 x 44.5 x 45.7 cm)
Weight	21.96 lbs (9.96 kg) per switch with 2 power supplies and built-in fan	Acoustic noise	No greater than 71.5 LwAd dB
AC input voltage	90 to 264 VAC	Included optic connector	LC
Included optic fiber type	Multimode fiber	Included optic reach	100G: 70m on OM3 or 100m on OM4; 40G: 100m on OM3 or 150m on OM4
Minimum software release	Cisco IOS XE Fuji 16.8.1a		

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[View Product Page](#)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.