


CISCO · CATALYST 9600 SWITCHES

C9610R

10-Slot Modular Chassis · 8 Line-Card Slots · C9610R Core Switch

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

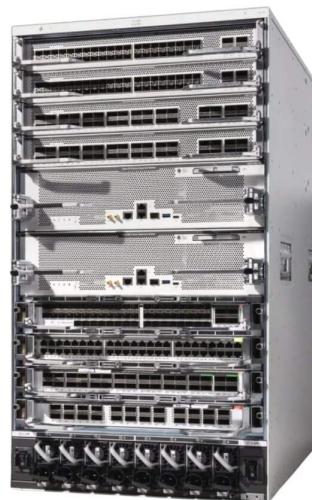

Product Model	C9610R
Category	Catalyst 9600 Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+

Customers Worldwide


US\$9M+

Ready-Stock Inventory

3-Year

Warranty

Layer23
switch.com



CISCO · CATALYST 9600 SWITCHES

C9610R

10-Slot Modular Chassis · 8 Line-Card Slots · C9610R Core Switch

C9610R is the Cisco C9610 Series Smart Switches 10-slot modular campus switch chassis for large campus core and aggregation designs, with eight line-card slots, two dedicated supervisor slots for C9610-SUP-3 or C9610-SUP-3XL, eight power-supply bays, and four fan-tray bays.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	C9610R	Product type	10-slot modular switch chassis
Cisco ordering description	Cisco C9610 Series Smart Switches 10-slot chassis	Ordering form	C9610R (=)
Total chassis slots	10	Line card slots	8
Supervisor engine slots	2	Dedicated supervisor slots	Slots 5 and 6
Supported supervisor engines	C9610-SUP-3 and C9610-SUP-3XL	Supervisor redundancy	Supported with two supervisor engine modules
Power supply bays	8	Minimum power supplies	4 using 3000W power supplies
Power supply selection	C9600-PWR-3KWAC 3000W AC, C9600-PWR-2KWAC 2000W AC, or C9600-PWR-2KWDC 2000W DC	Fan tray bays	4
Fan tray modules	Four C9610-FAN trays; each tray has six fans	Bandwidth per line-card slot	Up to 6.4 Tbps with C9610-SUP-3 or C9610-SUP-3XL
System switching capacity	Up to 51.2 Tbps with C9610-SUP-3 or C9610-SUP-3XL	Forwarding rate	Up to 15.6 Bpps with C9610-SUP-3 or C9610-SUP-3XL
Maximum 10G/25G/50G native ports	Up to 448 SFP56 Ethernet ports	Maximum 40G/100G native ports	Up to 256 QSFP28 Ethernet ports
Maximum 400G native ports	Up to 16 QSFP-DD Ethernet ports	Minimum software release	Cisco IOS XE 17.18.1
Rack units	18 RU	Dimensions	31.47 x 17.4 x 26.1 in. (79.93 x 44.20 x 66.29 cm)
Weight without fan trays and power supply units	184.0 lb (83.5 kg)	Weight with eight 3000W power supplies and four fan trays	266.0 lb (120.7 kg)
Operating temperature	23 to 104°F (-5 to +40°C), up to 6,000 ft (1,800 m)	Storage temperature	-40 to 158°F (-40 to 70°C), up to 10,000 ft (3,000 m)

Get Price and Availability for C9610R

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](#) Telegram [@layer23_switch](#)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.

LAYER23-SWITCH