

CISCO PHONE

CP-7832-K9

Conference Phone · 360-Degree Mic Coverage · Enhanced UCL

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock



Product Model	CP-7832-K9
Category	Cisco Phone
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+


Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty

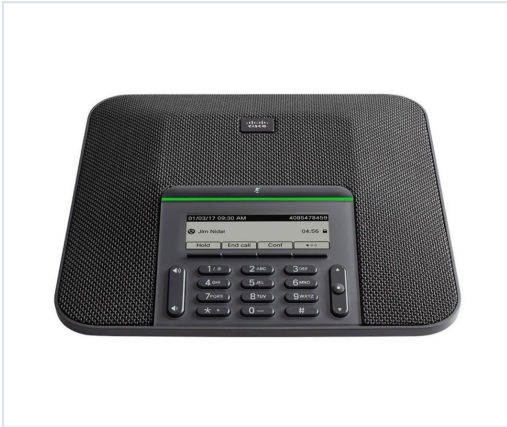

CISCO PHONE

CP-7832-K9

Conference Phone · 360-Degree Mic Coverage · Enhanced UCL

CP-7832-K9 is the Cisco IP Conference Phone 7832 in Cisco Smoke, a single-line IP conference phone for executive offices, huddle rooms, and small meeting rooms using Cisco Unified Communications Manager or Cisco Hosted Collaboration Solution. It provides 360-degree microphone coverage up to 7 ft. (2.1 m), a 3.4 in.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	CP-7832-K9	Cisco ordering ID	CP-7832-K9=
Product type	IP conference phone	Color	Cisco Smoke
Room coverage	360-degree microphone coverage up to 7 ft. (2.1 m)	Participant fit	Small meeting rooms and executive offices with up to six participants
Display	3.4 in. 384 x 128 monochrome LCD with backlit LED and antiglare bezel	Line support	Single line with multiple calls per line
Ethernet switch	10/100BASE-T	PoE class	IEEE 802.3af PoE Class 2
PoE compatibility	IEEE 802.3af and IEEE 802.3at switch blades	Power input rating	0.42A, 48V DC
Non-PoE power path	CP-7832-PWR-SPL= with Cisco Power Adapter 3	CUCM license	Enhanced User Connect License
CUCM support	Cisco Unified Communications Manager 12.5 and later	Hosted Collaboration support	Cisco Hosted Collaboration Solution 12.5 and later
Signaling protocol	Session Initiation Protocol	Audio codec support	G.711, G.722, G.722.2, G.729ab, iLBC, OPUS
Speaker frequency	100 Hz to 20 kHz	Microphone frequency	100 Hz to 12 kHz +/-3 dB
Maximum adjustable volume	85 dB within 0.5 m	Security support	SHA-256, TLS 1.2, SRTP, HTTPS, SSH, MIC, and 802.1X options
Dimensions	8.90 x 8.90 x 2.14 in. (226 x 226 x 54.4 mm)	Weight	2.0 lb (0.907 kg)
Casing composition	Acrylonitrile Butadiene Styrene textured plastic	Operating temperature	32 to 104 degrees F (0 to 40 degrees C)
Operating humidity	10% to 90%, noncondensing	Related color PID	CP-7832-W-K9= for Cisco White

[Request a Quote](#)[View Product Page](#)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.