

CISCO VIDEO CONFERENCING

CS-DESKMINI-K9

15.6-inch Touch Display · USB-C BYOD · Cisco Desk Mini

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock



Product Model	CS-DESKMINI-K9
Category	Cisco Video Conferencing
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+


Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty

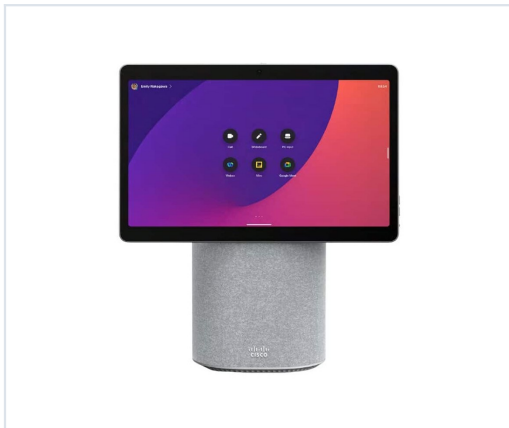

CISCO VIDEO CONFERENCING

CS-DESKMINI-K9

15.6-inch Touch Display · USB-C BYOD · Cisco Desk Mini

The CS-DESKMINI-K9 is the Cisco Desk Mini in First Light gray, an all-in-one personal collaboration endpoint at compliance model TTC9-01. A 15.6-inch IPS LED touch display runs 1080p at 16:9 with projected capacitive multi-touch, set on a fixed 11-degree tilt with the display and camera raised to a 7.9-inch height so the camera meets the user at eye level rather than from below.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	CS-DESKMINI-K9	Cisco ordering description	Cisco Desk Mini (First Light gray) upfront GPL
Compliance model number	TTC9-01	Spare part number	CS-DESKMINI-K9=
Display	15.6-inch LCD monitor at 1080p resolution (16:9) on an IPS LED panel	Display characteristics	700:1 typical contrast, plus or minus 85 degree typical viewing angle, 250 cd/m2 brightness, 16.7M colors and 72% NTSC gamut equal to 95% sRGB
User interface	Projected capacitive multi-touch	Supported PC resolution	1080p60
Camera field of view	64 degrees horizontal and 50 degrees vertical at f/2.0	Image sensor	8MP supporting up to 30 fps on 1/3.2-inch CMOS
Camera adjustment	Automatic tilt adjustment with automatic focus, brightness and white balance, focus distance 20 cm to infinity	Camera privacy	Privacy shutter with front LED light for incoming calls and camera activation
Video standards	H.263 and H.264 AVC	Video input	USB-C DisplayPort alternate mode up to 1920 x 1080p60
Encode and decode	Video stream at full HD 1080p60 with content stream at 4K 2160p15 and full HD 1080p60	Audio standards	G.711, G.722, G.722.1, G.729, AAC-LD and Opus
Audio features	Acoustic echo cancellation, active lip synchronization, automatic gain control, focused sound pickup, de-reverberation and full duplex	Audio inputs	Premium 3-element microphone system for angle estimation, audio in from USB-C, USB and Bluetooth
Audio outputs	USB headset and Bluetooth headset	Integrated loudspeaker	Premium single-channel system with 18mm tweeter and dual force-cancelling 80mm woofers, 65 Hz to 20 kHz at 85 dBSPL and 92 dB maximum SPL
USB-C BYOD	Display extension at 1920 x 1080 at 60 fps with Alt-mode DisplayPort, touch redirect on supported operating systems, and camera, microphone and speaker use by any software client	Other USB ports	One standard type-A port for headsets and handsets plus one micro-B service port
Network	One Ethernet RJ-45 10/100/1000 for LAN	Sensors	Experimental temperature and humidity reporting to Control Hub analytics
Power input	0.5A to 0.3A at 100 to 240V and 50 to 60Hz, rated 60W maximum	Power consumption	7.5W networked standby and 0.3W powered off

Dimensions	14.6 x 16.25 x 5.3 in (37.1 x 41.3 x 13.5 cm) at 8.5 lb (3.9 kg)	Packaged dimensions	21.4 x 18.8 x 11 in (54.6 x 48 x 28 cm) at 17 lb (8.04 kg)
Ergonomic design	Fixed screen tilted 11 degrees with raised display and camera at 7.9 in display height	Physical buttons	Power button and volume buttons
Operating temperature	0 to 35 degrees C at 20% to 90% relative humidity	Storage and transport	-20 to 60 degrees C at 10% to 90% RH noncondensing
Software compatibility	Room OS 11 or later	Default components	Cisco Desk Mini, USB-C cable and power cable
Optional hardware	Stylus kit and Ethernet cable	Software option and accessory	LIC-DESK-MS MultiSite embedded multipoint and CAB-ETH-3M-GR= 3 meter grey Ethernet cable

Get Price and Availability for CS-DESKMINI-K9

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](https://www.whatsapp.com/channel/00253535353535353535) Telegram [@layer23_switch](https://t.me/layer23_switch)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.