

CISCO VIDEO CONFERENCING

CS-DESKPRO-K9

27-inch 4K Touch Display · 12 MP Camera and USB-C BYOD · Cisco Desk Pro

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock



Product Model	CS-DESKPRO-K9
Category	Cisco Video Conferencing
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+


Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty

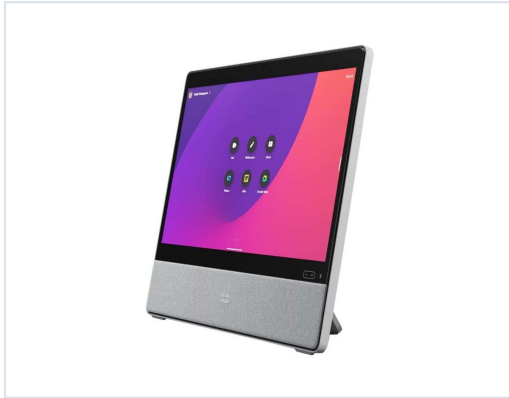

CISCO VIDEO CONFERENCING

CS-DESKPRO-K9

27-inch 4K Touch Display · 12 MP Camera and USB-C BYOD · Cisco Desk Pro

The CS-DESKPRO-K9 is the Cisco Desk Pro, an all-in-one video collaboration endpoint built around a 27-inch 4K touch display for personal desks and single-occupant meeting spaces.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	CS-DESKPRO-K9	Cisco ordering description	Cisco Desk Pro - Upfront GPL
Compliance model number	TTC7-27	Spare part number	CS-DESKPRO-K9=
Display	27-inch LCD monitor at 3840 x 2160 4K resolution (16:9)	Display panel	High-contrast IPS LED
Contrast ratio	1000:1 typical	Viewing angle	Plus or minus 89 degrees typical
Brightness	300 cd/m2	Color depth	1.07B colors
Color gamut	72% NTSC (100% sRGB)	Touch interface	Projected capacitive multi-touch with optically bonded cover glass
Supported PC resolutions	1080p60, 1440p60, 2160p30 and 2160p60	Camera	4K Ultra HD with automatic tilt adjustment, focus, brightness and white balance
Camera field of view	71 degrees horizontal and 59 degrees vertical	Image sensor	12 MP supporting up to 30 fps, 1/2.8 in CMOS with Dual Pixel Technology
Camera aperture	f/2.0	Focus distance	20 cm to infinity
Camera privacy	Privacy shutter with LED light	Video standards	H.264 AVC with H.263 compatibility for TANDBERG MXP endpoints
Video inputs	USB-C DisplayPort Alternate Mode and HDMI 2.0 type A, both up to 3840 x 2160p60	Video output	HDMI 2.0 type A up to 3840 x 2160p60
Video stream	1920 x 1080 at 30 fps	Content stream	3840 x 2160 at 15 fps
Audio standards	G.711, G.722, G.722.1, G.729, AAC-LD and Opus	Audio features	20-kHz audio, automatic gain control, automatic noise reduction, active lip synchronization and keyclick suppression
Audio inputs	Internal 8-element microphone array, USB and Bluetooth	Audio outputs	Analog stereo minijack, USB and Bluetooth headset
Integrated loudspeakers	Left, center and right channels for directional audio plus dual woofers in balanced configuration	Speaker frequency response	60 Hz to 20 kHz
Amplifier power	4 x 14W	USB-C BYOD	3840 x 2160 at 60 fps display extension, touch forwarding, camera and audio passthrough, and 60W laptop charging

USB ports	Three standard type A ports plus one Micro-B service port	Network interface	Internal 2-port Cisco Ethernet switch on 10/100/1000BASE-T with RJ-45
Wireless	Wi-Fi 802.11a/b/g/n/ac on 2.4 GHz and 5 GHz	Bandwidth requirement	Up to 6 Mbps point-to-point
Call control	Unified CM, Cisco Expressway, Webex Service, third-party H.323 gatekeepers and standards-based SIP proxies	Unified CM baseline	Version 10.5 or later with the latest device pack
Embedded encryption	Webex end-to-end, H.235 v3 and AES with automatic key generation and exchange	Wireless sharing	Webex, Miracast, Apple AirPlay in native Webex Meetings, and Microsoft Teams Cast in MTR mode
Multipoint support	5-way embedded SIP/H.323 conferencing with the MultiSite option	MultiSite capacity	3-way up to 1080p at 30 fps, 4-way up to 720p at 30 fps, 5-way up to 720p at 30 fps with content
Sensors	Ambient light sensor, 1D Time-of-Flight LiDAR presence detection under 80 cm at 25 degrees, plus temperature and humidity reporting	Rated power	200W maximum
Standby power	15W	Operating temperature	0 to 35 degrees C (32 to 104 degrees F)
Operating humidity	20% to 90% relative humidity	Storage and transport	-20 to 60 degrees C at 10% to 90% RH noncondensing
Dimensions	24.8 x 20.1 x 3 in (63 x 51 x 7.5 cm), 7.1 in depth with desk stand attached	Weight	24.4 lb (11.6 kg)
Packaged dimensions	30.7 x 30.7 x 8.6 in (78 x 78 x 22 cm)	Packaged weight	35.2 lb (16 kg)
Controls and indicators	Power button, touch volume up and down with LED, microphone mute with LED, and camera-on LED	Locking mechanism	Kensington security lock
Software compatibility	RoomOS 11 or later and Microsoft Teams Rooms on Android	Web engine	Chromium-based RoomOS engine supporting digital signage, WebRTC and web-based applications
Default shipped components	Desk stand, stylus with two spare tips, 3 m network cable, 1.8 m USB-C cable, 1.5 m HDMI 2.0 presentation cable and Cisco Desk Pro power supply	Optional hardware	VESA adapter and wall mount kit, replaceable metal speaker grille
Accessory part numbers	CS-DESKPRO-STAND=, CS-DESKPRO-VESA=, CS-DESKPRO-FG=, CS-DESKPRO-MG=, CS-PWR-CUBE-7= and CS-DESK-STYLUSKIT=	Software options	L-DESK-SERIES-RM for Remote Monitoring and LIC-DESKPRO-MS for MultiSite
Product registration	A-FLEX-C-DEVICE, A-FLEX-P-DEVICE or A-FLEX-P-DEV-11X	Approvals and compliance	Directive 2014/53/EU, 2014/30/EU, 2014/35/EU, RoHS 2011/65/EU, WEEE 2002/96/EU, NRTL safety, FCC CFR 47 Part 15B Class A, Part 15C and Part 15E

Get Price and Availability for CS-DESKPRO-K9

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](https://www.whatsapp.com/channel/00253333333333333333) Telegram [@layer23_switch](https://t.me/layer23_switch)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.

LAYER23-SWITCH