


CISCO · MDS 9100 SERIES SWITCHES

DS-C9132T-MEK9

8x32G FC Ports · Base 1RU Chassis · Exhaust SAN Switch

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

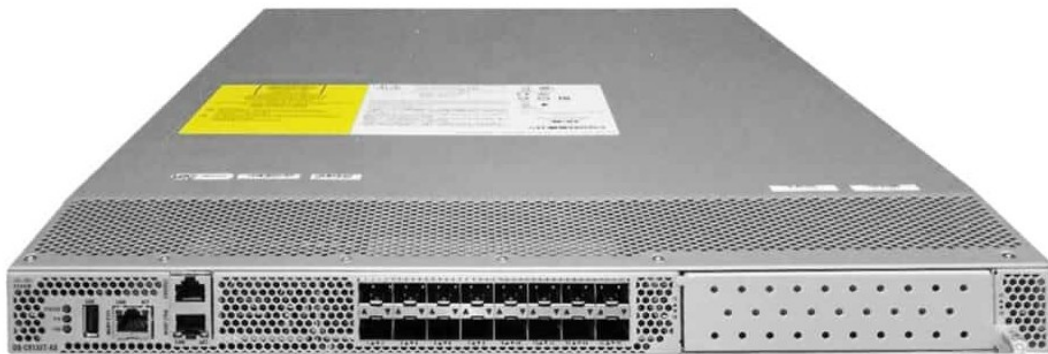

Product Model	DS-C9132T-MEK9
Category	MDS 9100 Series Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+

Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty



CISCO · MDS 9100 SERIES SWITCHES

DS-C9132T-MEK9

8x32G FC Ports · Base 1RU Chassis · Exhaust SAN Switch

DS-C9132T-MEK9 is a Cisco MDS 9132T 32G Fibre Channel SAN switch for storage-network fabric deployments that need an exhaust-airflow base order with separately selected FC optics.

New, factory-sealed · [3-year LSCare warranty](#) · [14-day returns](#) · [Cisco SN check before shipment](#)

Specifications

Product ID	DS-C9132T-MEK9	Product compatibility	Cisco MDS 9000 Family
Product type	Base 32G Fibre Channel SAN switch	Order configuration	8 active FC ports, 2 fans, 1 PSU, port-side exhaust
Form factor	1RU chassis	Fibre Channel ports	16 SFP+ ports
Expansion module option	M9XT-FC1632 16-port SFP+ expansion module	Active ports at order	8 FC ports active at shipment
Maximum Fibre Channel ports	32 active FC ports	Fibre Channel speed support	Autosensing 4/8/16/32 Gbps operation
Dedicated bandwidth per port	32 Gbps dedicated bandwidth	Aggregate bandwidth	1024 Gbps end-to-end full duplex
Port channel support	Up to 16 load-balanced physical links per port channel	Buffer credits	Up to 8300 credits per 16-port group; 500 credits per port by default
Maximum buffer credits for a single port	8270 credits within the 16-port group	Port activation license	M9132T-PL8 8-port On-Demand Activation license
Optional network license	M9100-ENT1K9 or L-M9100ENT1K9 Cisco MDS 9000 Family Enterprise Package	Management Ethernet ports	Two 10/100/1000 Mbps Ethernet management ports
Console and USB ports	RS-232 serial console and USB power-on auto-provision port	Minimum NX-OS release	Cisco MDS NX-OS 8.2(1) or later
Minimum Cisco DCNM release	Cisco DCNM 10.4(1) or later	Fan modules	2 fan modules
Power supplies	1 power supply	Matching power supply spare	DS-CAC-650W-E 650W AC port-side exhaust power supply
Matching fan spare	DS-C32S-FAN-E port-side exhaust fan module	AC input voltage	100 to 240 VAC, 50 to 60 Hz nominal
Typical power consumption	80W for 8 active ports with 32G SFPs, traffic, and 25C ambient temperature	Airflow direction	Back to front airflow toward the port side
System airflow rate	50 CFM through the system fan assembly at 25C; 100 CFM maximum	Dimensions	1.72 x 17.3 x 20.11 in. excluding PSU and fan module handles
Weight	21.65 lb (9.82 kg)	Supported FC optics	32G SW/LW, 16G SW/LW/ELW, 8G SW/LW/ER, and 8G CWDM SFP+ optics

Get Price and Availability for DS-C9132T-MEK9

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](https://www.whatsapp.com/channel/00299a60000000000000000000000000) Telegram [@layer23_switch](https://t.me/layer23_switch)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.

LAYER23-SWITCH