

CISCO · CATALYST IE3400 RUGGED SWITCHES

IE-3400H-24T-A

24x1G M12 X-coded Ports · IP66/IP67 Rated · Network Advantage

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock



Product Model	IE-3400H-24T-A
Category	Catalyst IE3400 Rugged Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+


Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty

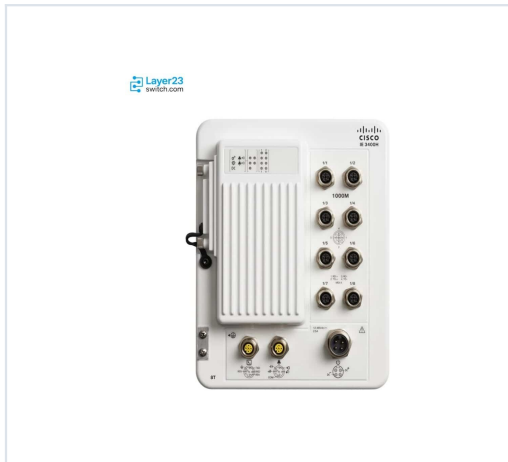

CISCO · CATALYST IE3400 RUGGED SWITCHES

IE-3400H-24T-A

24x1G M12 X-coded Ports · IP66/IP67 Rated · Network Advantage

The IE-3400H-24T-A is a 24-port Cisco Catalyst IE3400 Heavy Duty Series industrial switch for wall-mounted zones that have no cabinet or climate control. The switch has 24 Gigabit ports on M12 X-coded connectors, a single 9.6V to 60V DC input, IP66/IP67 protection and 49.0W of power consumption at 9.6V.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	IE-3400H-24T-A	Network license	Network Advantage, perpetual (upgrade PID for -E units: IE3400H-NW-A=)
Ports	24x 10/100/1000M GE, M12 X-coded 8-pin	Ingress protection	IEC 60529 IP66/IP67; UL 50E Type 4X; UL/CSA/EN/IEC 60950-22 outdoor
Forwarding	Line rate, all ports and packet sizes; 8 egress queues	MAC / routes	16K MAC; 3000 IPv4 + 512 IPv6 indirect routes (Network Advantage)
VLANs / ACL	256 VLANs; 128 STP instances; 3,024 PACL entries	Memory	4 GB DRAM; 1.5 GB user flash; optional 4/16 GB SD card
Jumbo frames	8996 bytes (2000 bytes with ERSPAN/DLR/PRP/HSR/SGT)	Advantage features	OSPF/BGP/RIP/ISIS/EIGRP (v4+v6), PBR, VRRP/HSRP, VRF-lite, VRF-Aware SGT, TrustSec SGT/SGACL, MACsec-256, multicast routing
Essentials baseline	REP/Fast REP, PROFINET-MRP, PRP (Gig1/1-1/4), HSR-SAN, HSR-PRP Dual Redbox, DLR, L2NAT (Gig1/1-1/2), CIP, PROFINET (certified), MACsec-128, FIPS 140-2, IOx	PTP timing	IEEE 1588 PTPv2, Default and Power Profile; PTP over PRP
Management	WebUI, Cisco Catalyst Center, NETCONF/RESTCONF/YANG, Full Flexible NetFlow	Input power	Single DC input, Mini-Change connector, 9.6-60VDC; 5.1A max at 9.6V
Power consumption	49.0W at 9.6V; 49.8W at 60V	Compatible IP67 DC unit	PWR-IE160W-67-DC= ordered separately (18-60V in, 54V/160W out); Molex Mini-Change cordsets
Alarms / console	1 alarm in, 1 alarm out (24VDC at 1.0A / 48VDC at 0.5A); M12 A-coded console (CAB-CONSOLE-M12=)	Operating temperature	-40°C to +75°C (200 LFM); +70°C (40 LFM); +60°C still air; +85°C type-tested 16 h
Altitude / humidity	To 13,800 ft (4,200 m); 5-95% non-condensing; storage -40°C to +85°C	Dimensions (H x W x D)	9.58 x 13.90 x 3.15 in (24.33 x 35.31 x 8.00 cm), wall mount
Weight / MTBF	6.30 kg (13.90 lb) with brackets; 439,475 hours	Industrial compliance	IEC 62443-4-1/-4-2, ODVA EtherNet/IP, PROFINET, AREMA C&S 11/19; corrosion IEC 60068-2-52/-2-60
Vehicle / rail (GE SKUs)	UN ECE R10, E-Mark; EN50155:2021, EN50121-3-2/-4:2021, EN61373:2010, EN50124-1:2017, EN50153:2020, EN45545-2		

Get Price and Availability for IE-3400H-24T-

A

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](https://www.whatsapp.com/channel/0025-v3018-23018) Telegram [@layer23_switch](https://t.me/layer23_switch)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.

LAYER23-SWITCH