


CISCO · INDUSTRIAL ETHERNET 4000 SWITCHES

IE-4000-8GT4G-E

8xGE Copper Ports · 4xGE Combo Uplinks · LAN Base

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

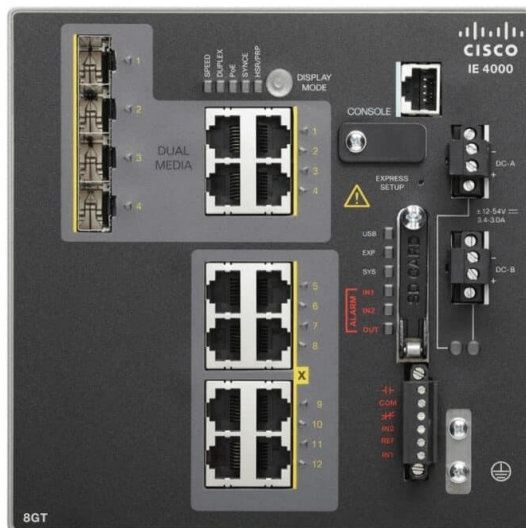

Product Model	IE-4000-8GT4G-E
Category	Industrial Ethernet 4000 Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+


Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty



CISCO · INDUSTRIAL ETHERNET 4000 SWITCHES

IE-4000-8GT4G-E

8xGE Copper Ports · 4xGE Combo Uplinks · LAN Base

IE-4000-8GT4G-E is a Cisco Industrial Ethernet 4000 Series managed switch for industrial edge networks in manufacturing, transportation, energy, and other hardened Ethernet environments.

New, factory-sealed · 3-year LSCare warranty · 14-day returns ·
Cisco SN check before shipment

Specifications

SKU	IE-4000-8GT4G-E	Device type	Managed industrial Ethernet switch
Total ports	12	Downlink ports	8 x Gigabit Ethernet copper
Uplink ports	4 x Gigabit Ethernet combo SFP or RJ45	Default software feature set	LAN Base
Layer 2 switching features	VTPv2, VTPv3, REP, EtherChannel, Voice VLAN, QinQ tunneling	Industrial Ethernet features	CIP Ethernet/IP, PROFINET v2, IEEE 1588 PTP v2, NTP to PTP translation, CIP Time Sync
Power input	Redundant DC input	Input voltage range	9.6 to 60 VDC nominal
Maximum input current	3.7 A	Power consumption	35 W measured at 9.6 V without PoE power
Dimensions	6.12 x 6.12 x 5.09 in. (155.4 x 155.4 x 129.2 mm)	Weight	6.35 lb (2.88 kg)
Forwarding rate	Line rate for all ports and all packet sizes	Number of queues	4 egress
Unicast MAC addresses	16000	IGMP multicast groups	1000
VLAN count	1000	IPv4 MAC security ACEs	1000 with default TCAM template
NAT translation	Bidirectional 128 unique subnet NAT translation entries	Operating temperature	-40C to +70C vented, -40C to +60C sealed, -34C to +75C with fan or blower enclosure
Relative humidity	5% to 95% non-condensing	Altitude	Up to 15000 ft
MTBF	591240 hours		

Optional Add-ons

Add-on	Cisco PID	Purpose
Power Supply / Fan	PWR-IE50W-AC	50W AC/DC PSU - 24VDC Output - DIN-Rail
Power Supply / Fan	PWR-IE50W-AC-L	50W AC PSU - 24VDC Output - DIN-Rail
Power Supply / Fan	PWR-IE50W-AC-IEC	50W AC PSU - IEC C14 Input - 24VDC Output
Optics	GLC-LH-SMD	1000BASE-LX/LH SFP - 10km SMF / 550m MMF - DOM
Optics	GLC-TE	1000BASE-T SFP - RJ-45 Cat5 Copper - 100m Reach

Optics	GLC-SX-MMD	1000BASE-SX SFP - MMF 850nm - DOM
Optics	GLC-EX-SMD	1000BASE-EX SFP - 40km SMF - DOM
Optics	GLC-ZX-SMD	1000BASE-ZX SFP - 70km SMF - EXT DOM

Get Price and Availability for IE-4000-8GT4G-E

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](https://www.whatsapp.com/channel/00299a60000000000000000000000000) Telegram [@layer23_switch](https://t.me/layer23_switch)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.