


CISCO ISR 4000 ROUTER MODULES & CARDS

NIM-24A

24x RS-232 Async Ports · Single-Wide NIM

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

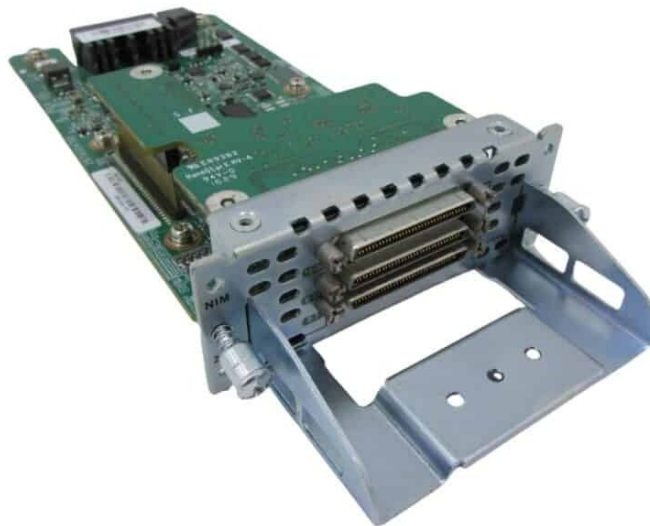

Product Model	NIM-24A
Category	Cisco ISR 4000 Router Modules & Cards
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+


Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty

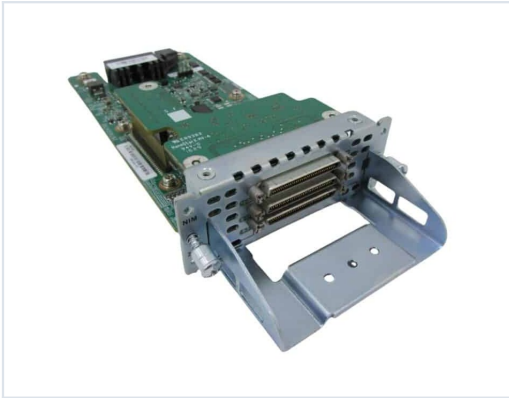

CISCO ISR 4000 ROUTER MODULES & CARDS

NIM-24A

24x RS-232 Async Ports · Single-Wide NIM

NIM-24A is a Cisco 4000 Series Integrated Services Router Network Interface Module that adds 24 RS-232 asynchronous ports for terminal-server access and out-of-band console management of remote devices across a LAN or WAN.

New, factory-sealed · 3-year LSCare warranty · 14-day returns ·
Cisco SN check before shipment

Specifications

Product ID	NIM-24A	Product type	Asynchronous serial Network Interface Module
Cisco description	24-Port Async Serial NIM	Supported interface	RS-232
Port count	24 async serial ports	Form factor	Single-wide NIM
Supported platform family	Cisco 4000 Series Integrated Services Routers	Listed ISR platforms	Cisco 4221, 4321, 4331, 4351, 4431, and 4451
Minimum Cisco IOS Software release	16.3.1	Cisco IOS XE feature set	IP Base and up
Cable sockets	3 asynchronous cable sockets	Supported cable SKUs	CAB-ASYNC-8; CAB-HD8-ASYNC only on Cisco-allowed NIM-24A sockets
Recommended connection rate	9600 baud	Higher connection rates	Use only with a low number of simultaneous connections
Unsupported protocols	SLIP and PPP are not supported	Interface addressing	interface async slot/subslot/port
LED indicators	Module status, port 0-7 status, port 8-15 status, and port 16-23 status	Line numbering	24 line numbers per subslot on Cisco 4000 Series ISR platforms
Slot service procedure	Shut down slot power or use Cisco OIR commands before install or removal	Physical form factor rule	Single-wide NIM and SM-X modules, no slot restrictions
Dimensions	1.25 x 3.5 x 6.7 in. / 32 x 89 x 172 mm	Operating temperature	32 to 104 degrees F (0 to 40 degrees C)
Storage temperature	-4 to 149 degrees F (-20 to 65 degrees C)	Relative humidity	10 to 90 percent, noncondensing

Get Price and Availability for NIM-24A

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](https://www.whatsapp.com/channel/0025-v3070-23switch) Telegram [@layer23_switch](https://t.me/layer23_switch)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.