Layer23 switch.com


PRODUCT DATASHEET
Revised October 2026

CISCO · CATALYST 9400 SWITCHES

C9400-LC-48H-UL

48x1G RJ-45 · UPOE+ 90W · UL1069 Variant


New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

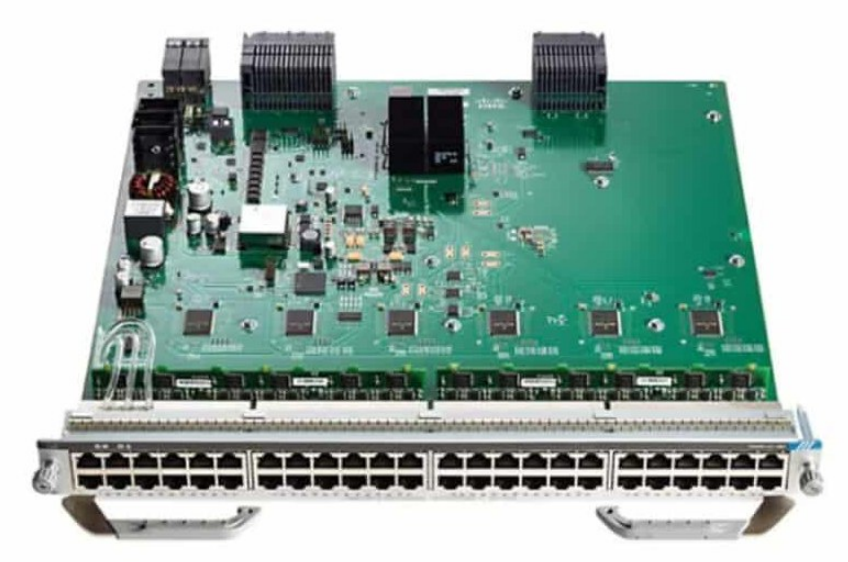

Product Model	C9400-LC-48H-UL
Category	Catalyst 9400 Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com

Scan for price and stock

200+	18,000+	US$9M+	3-Year
Countries Served	Customers Worldwide	Ready-Stock Inventory	Warranty

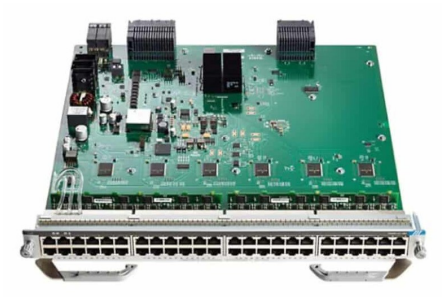

CISCO · CATALYST 9400 SWITCHES

C9400-LC-48H-UL

48x1G RJ-45 · UPOE+ 90W · UL1069 Variant

The C9400-LC-48H-UL is a Cisco Catalyst 9400 Series UPOE+ line card, the UL1069-compatible version of the 48-port 10/100/1000M copper card, for campus access closets that power endpoints over RJ-45. The card has 48 ports with up to 90W per port under IEEE 802.3bt and installs in any non-supervisor slot of the C9404R, C9407R and C9410R.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	C9400-LC-48H-UL	**Product type**	Line card
Cisco ordering description	Cisco Catalyst 9400 Series 48-Port UPOE+ 10/100/1000 RJ-45 line-card entry with UL1069 compatibility	**Supervisor compatibility**	C9400-SUP-1, C9400-SUP-1XL, C9400-SUP-1XL-Y, C9400X-SUP-2, and C9400X-SUP-2XL
Total ports	48	**Port speed**	10/100/1000M
Port type	RJ-45 UPOE+ IEEE 802.3bt, IEEE 802.3at, IEEE 802.3af, and Cisco pre-standard	**Installation slot rule**	Any non-supervisor module slot
C9404R port density	48 / 96	**C9407R port density**	48 / 240
C9410R port density	48 / 384	**Base line-card family**	C9400-LC-48H
C9410R 90W scale note	Up to 260 90W PoE ports from 384 on C9410R for the 48H line-card family	**Full 90W scale note**	Fully loaded 90W on C9407R and C9404R for the 48H line-card family
Energy efficient Ethernet	IEEE 802.3az support	**MACsec capability**	IEEE 802.1AE MACsec-256 capability in hardware
Spare PID convention	Ordering table indicates "=" as spare	**Jumbo frames**	Layer 2 to Layer 4 jumbo frame support up to 9216 bytes
Minimum software release	Cisco IOS XE Software Release 16.12.1 or later	**Max rated power**	65 W for the C9400-LC-48H line-card family
UPOE+ power	Up to 90W IEEE 802.3bt on the C9400-LC-48H line-card family	**MTBF**	874,140 hours for the C9400-LC-48H line-card family

LAYER23 SWITCH

Get Price and Availability for C9400-LC-48H-UL

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

Request a Quote

View Product Page

Email sales@layer23-switch.com WhatsApp +86 171 8118 9993 WeChat layer23-switch Telegram @layer23_switch

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.