


CISCO · CATALYST 9600 SWITCHES

C9600-LC-40YL4CD

40xSFP56 · 2xQSFP56 and 2xQSFP-DD · Catalyst 9600 Line Card

New, factory-sealed · 3-year LSCare warranty · Ships from Hong Kong and US stock

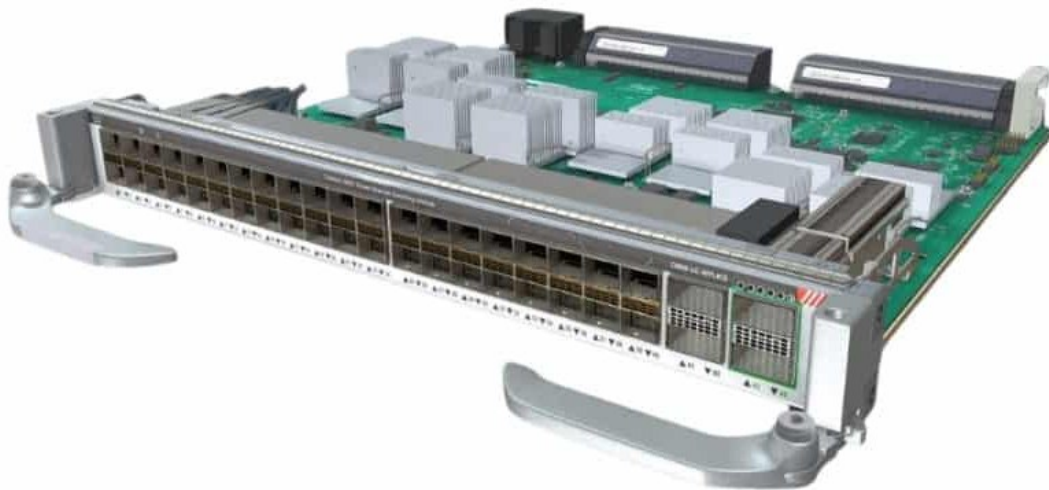

Product Model	C9600-LC-40YL4CD
Category	Catalyst 9600 Switches
Condition	New, factory-sealed
Warranty	3-year LSCare warranty
Supplier	Layer23-Switch · www.layer23-switch.com



Scan for price and stock

200+

Countries Served

18,000+

Customers Worldwide

US\$9M+

Ready-Stock Inventory

3-Year

Warranty



CISCO · CATALYST 9600 SWITCHES

C9600-LC-40YL4CD

40xSFP56 · 2xQSFP56 and 2xQSFP-DD · Catalyst 9600 Line Card

The C9600-LC-40YL4CD is a Cisco Catalyst 9600 Series combo line card for Catalyst 9606R chassis in campus aggregation and core designs. The card has 40 SFP56 ports, 2 QSFP56 ports and 2 QSFP-DD ports, and it installs in slots 1, 2, 5 and 6 with either C9600X-SUP-2 or C9600-SUP-1.

New, factory-sealed · 3-year LSCare warranty · 14-day returns · Cisco SN check before shipment

Specifications

Product ID	C9600-LC-40YL4CD	Product type	Combo line card
Supported chassis	Cisco Catalyst 9606R	Installation slot rule	Slots 1, 2, 5, and 6
Supervisor compatibility	C9600X-SUP-2 and C9600-SUP-1	Minimum software release	Cisco IOS XE 17.7.1
SFP56 ports	40	SFP56 speed with C9600X-SUP-2	50G, 25G, and 10G
SFP/SFP28 speed with C9600-SUP-1	25G, 10G, and 1G	QSFP56 ports with C9600X-SUP-2	2 ports supporting 200G, 100G, and 40G
QSFP-DD ports with C9600X-SUP-2	2 ports supporting 400G, 200G, 100G, and 40G	QSFP-DD support with C9600-SUP-1	Not supported
QSA adapter support with C9600X-SUP-2	CVR-QSFP-SFP10G with 10G transceivers	QSA adapter support with C9600-SUP-1	CVR-QSFP-SFP10G with 10G and 1G transceivers
Bandwidth with C9600X-SUP-2	6.4 Tbps (3.2 Tbps full-duplex) per slot	Bandwidth with C9600-SUP-1	2.4 Tbps (1.2 Tbps full-duplex) per slot
Port group restriction with C9600X-SUP-2	Adjacent SFP56 ports in a port group must run the same speed	QSFP restriction with C9600X-SUP-2	Port 43 speed determines port 44 speed
AC input power	466 W	DC output power requested	420 W
Heat dissipation	1,590 BTU/hr	Weight	3.75 kg (8.27 lb)
Operating temperature up to 6000 ft	-5°C to 45°C (23°F to 113°F)	Operating altitude	-60 to 3000 m (-197 to 9843 ft)

Get Price and Availability for C9600-LC-40YL4CD

New, factory-sealed units with a 3-year warranty. Our sales team quotes within one business day, and in-stock orders ship within one business day of payment from our Hong Kong and US warehouses.

[Request a Quote](#)

[View Product Page](#)



Email sales@layer23-switch.com WhatsApp [+86 171 8118 9993](https://wa.me/8617181189993) WeChat [layer23-switch](https://www.whatsapp.com/channel/00299a60000000000000000000000000) Telegram [@layer23_switch](https://t.me/layer23_switch)

Address 2810 North Church Street, Suite 89727, Wilmington, DE 19802, USA

Cisco and Cisco product names are trademarks of Cisco Systems, Inc. Specifications are summarized from manufacturer documentation for reference; confirm the exact configuration with Layer23-Switch before ordering. Revised October 2026.

LAYER23-SWITCH